

DWS-ARS

Point-of-Entry Treatment Solution for Arsenic



ECOWATER
SYSTEMS®



Your Water. Perfected.

Let us
Perfect
your water and
Maximize
your peace of mind.

ETF2300

ECOWATER SERIES – WATER FILTRATION SYSTEMS


Proven System for Removing Iron and Treating Problem Water

- 1 Electronic Timer Controls with HydroLinkPlus® Wi-Fi and Smartphone App Monitoring**
Wi-Fi enabled technology sends continuous and excessive water use, system error and service reminder alerts.

Water Meter
Allowing for chemical feed dosing, flow switch operation and water use information.
- 2 Full One-Inch Riser**
One-inch diameter for increased flow rates, which ensures that household demand is adequately met.
- 3 Multi-Wrap Fiberglass Reinforced Media Tank**
Durable fiberglass-wrapped tank liner – doesn't deteriorate, rust, or corrode.
- 4 Self-Cleaning Distributors**
Distributors exhibit excellent flow rates and are cleaned automatically by counter-current water pressure.
- 5 Choose Media for Custom Applications**
- 6 Washed Quartz Underbedding**
Washed quartz underbedding aids in dispersion of water throughout the media tank.
- 7 Bypass Valve (optional)**
Brass-free and lead-free bypass valve lets you manually bypass the system.

Fully Ported One-Inch Valve with Easy-Clamp Ring and Patented Disc.

Energy Efficient Power Supply
Simplifies installation, maintenance and reduces electrical hazards.

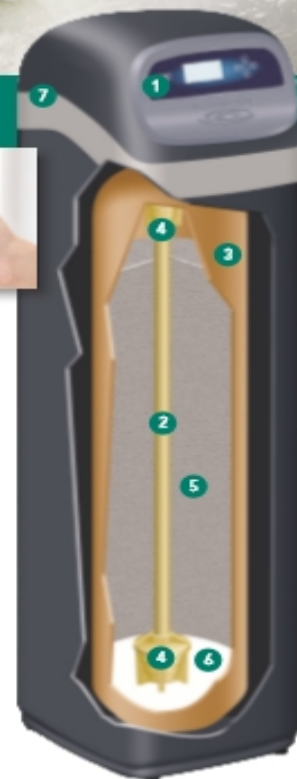


 Designed, Engineered & Assembled in the U.S.A.

ETF2300 (PF10 & PF12, IF10)

ECOWATER SERIES
WATER FILTRATION SYSTEMS

DIMENSIONS



	ETF2300 IF10 & PF10	ETF2300 PF12
Nominal Resin Tank Size	10" Diam. x 47"	12" Diam. x 54"
A	57"	62 1/4"
B	50"	55 3/4"

SPECIFICATIONS


Multi-purpose Filters (3 media choices)	ETF2300PF10	ETF2300PF12
Sediment Removal Service Water Flow Rate (gpm) Type of Media: Filter Aggregate Contaminant Limits	4	Based on water analysis
Acid Neutralizer Service Water Flow Rate (gpm) Type of Media: Neutralite Lower pH Limit	8 6.0	8 6.0
Taste and Odor Removal Service Water Flow Rate (gpm) Type of Media: Activated Carbon Contaminant Limits	8	Based on water analysis
Amount Media Recommended (cu. ft.)	1 to 1 1/4	2
Amount Washed Quartz (lbs.)	17	29
Supply Water Pressure Limits (psi)	20-125	20-125
Supply Water Temperature Limits (F/ °C)	40-120 / 4-49	40-120 / 4-49
Minimum Inlet Water Flow (gpm) – Required for backwash and fast rinse on media listed above.* *Check with media manufacturer for other media requirements.	5	7
Iron Filter	ETF2300IF10	
Iron Removal (media)	Birm** (Ferris), MTM** or Manganese Treated Green Sand	
Iron Removal Limits (ppm)	20	
Amount Media Recommended (cu. ft.)	1 to 1 1/4	
Service Flow Rate (gpm)	8	
Supply Water Pressure Limits (psi)	20-125	
Supply Water Temperature Limits (F/ °C)	40-120 / 4-49	
Maximum Inlet Water Flow, Backwash and Fast Rinse Flow to Drain (gpm)	7	
Media Regenerant Material	Potassium Permanganate	
Amount Used Each Recharge (oz.)	2	

**Not for use or sale in California.

ECOWATER
SYSTEMS®



MSE



EcoWater Systems LLC
P.O. Box 64420
St. Paul, MN 55164-0420



EcoWater Canada Ltd.
5240 Bracco Blvd.
Mississauga, Ontario
Canada L4W 1G7



EcoWater Systems
Europe N.V.
Geoloweg 56 2250 Olen
Belgium



Kunshan EcoWater Systems Co. Ltd.
403 San Xiang Rd.
Kunshan, Jiangsu Province, PRC 215335